

Main unit

Power supply			AC100-240V, 50Hz/60Hz	
Power consumption ¹	Maximum power consumption		255 W (2.7A-1.1A) [260VA] (The power consumption is 245 W at 200-240V)	
	On-mode power consumption (Light power)	[NORMAL]	230 W(100-240V), 220 W(200-240V)	
		[ECO]	170 W(100-240V), 165 W(200-240V)	
		[QUIET]	165 W(100-240V), 160 W(200-240V)	
	Standby mode power consumption	[NORMAL]	12 W When [IN STANDBY MODE] in [AUDIO SETTING] is set to [OFF], [QUICK STARTUP] is set to [OFF], and <DC OUT> terminal is not in use.	
[ECO]		0.5 W		
BTU value			Max 870 BTU	
LCD panel	Size		16.3 mm [0.64 in] diagonal (16:10 aspect ratio)	
	Display system		Transparent LCD panel (x 3, R/G/B)	
	Number of pixels		2,304,000 (1920 x 1200) pixels	
	Colors		Approx. 1,073 Million colors (The maximum number of display colors varies depending on the signal.)	
Refresh rate			60 Hz Refresh rate varies depending on scanning frequency.	
Light source			Laser Diode	
Light output	Light Power	[NORMAL]	5,200 lm ¹ / 5,200 lm(ANSI) ² [PICTURE MODE] is set to [DYNAMIC], [DAYLIGHT VIEW] is set to [OFF], [AUTO POWER SAVE] is set to [OFF]	
		[ECO]	3,640 lm	
		[QUIET]	3,640 lm	
Time until light output declines to 50% ³	Light Power	[NORMAL]	20,000 hours	
		[ECO]	24,000 hours	
		[QUIET]	20,000 hours	
Filter Replacement Cycle			20,000 hours (Under the dust conditions of 0.08mg/m ³) 10,000 hours (Under the dust conditions of 0.15 mg/m ³) Filter cleaning cycle varies depending on the environment. The filter can be washed and reused up to two times.	
Resolution			1920 x 1200 pixels (Input signals that exceed this resolution will be converted to 1920 x 1200 pixels.)	
Contrast ratio ¹			5,000,000:1 (All White/All Black) When [PICTURE MODE] is set to [DYNAMIC], [DYNAMIC CONTRAST] is set to [1]	
Screen size			0.76-7.62 m [30-300 in], 16:10 aspect ratio	
Center to corner zone ratio ¹			85%	
Lens			1.2x Manual zoom (Optical) (Throw ratio 1.36-1.64:1) Manual focus lens, F=1.61-1.76, f=19.10-23.00 mm	
Digital Zoom Extender ⁴			Throw Ratio 1.36:1-2.05:1 ⁵ (Corresponding value) (When optical zoom is used together.)	
Lens shift (from the origin point of the lens mounter)		Vertical	+38%	
		Horizontal	±15%	
Installation			Ceiling/floor, front/rear, free 360-degree installation	
Compatible Signal	HDMI™ signal input		Moving image signal resolution: 480/60p, 576/50p to 4096 x 2160/30p Still image signal resolution: 640 x 480 to 3240 x 1080 (non-interlace) Dot clock frequency: 25.2 MHz to 297 MHz	
Terminals	<HDMI™ IN 1> <HDMI™ IN 2>		HDMI™-19 pin x 2 Deep Color, compatible with HDCP 1.4, 4K/30p signal input ⁶ , CEC supported ⁷ Audio Signal: Linear PCM (Sampling frequency: 48 kHz/44.1 kHz/32 kHz)	
	<AUDIO IN>		M3 stereo mini-jack x 1 0.5 V [rms], input Impedance 22 k Ohms or more	
	<AUDIO OUT>		M3 stereo mini-jack x 1 0 V [rms] to 2.0 V [rms] variable, output Impedance 2.2 k ohms or less	
	<SERIAL IN>		D-sub 9-pin (female) x 1 for computer control (RS-232C compliant)	
	<LAN>		RJ-45 x 1 for network connection, PLink™ (Class 2), compatible with 10Base-T/100Base-TX	
	<USB (VIEWER/WIRELESS/DC OUT)>		USB connector (Type A) x 1 for Memory Viewer function, optional Wireless Module AJ-WM50, power supply (DC 5 V, maximum 2 A)	

Supported Internet protocol version		IPv4, IPv6 ⁸
Power cord length		2.0 m [6 ft 7 in] (3.0 m [9 ft 10 in] for India)
Cabinet materials		Molded plastic
Dimensions ⁹	Width	399 mm [15 23/32 in] (excluding protrusions)
		399 mm [15 23/32 in] (including protrusions)
	Height	115 mm [4 17/32in] (excluding feet, protrusions)
		133 mm [5 1/4 in] (with the feet at shortest position, including protrusions)
	Depth	348 mm [13 11/16 in] (excluding protrusions)
		348 mm [13 11/16 in] (including protrusions)
Weight ¹⁰		Approx. 6.1 Kg (13.4 lbs)
Operating noise ¹	[NORMAL]	36 dB
	[ECO]	36 dB
	[QUIET]	26 dB
Laser Classification	Laser Class	Class 1 (IEC 60825-1:2014)
	Risk Group	Risk Group 2 (IEC 62471-5:2015)
Operating environment	Operating environment temperature	0 °C (32 °F) to 45 °C (113 °F) ¹¹ *The operating environment temperature should be between 0 °C (32 °F) and 40 °C (104 °F) when the optional Wireless Module (Model No.: AJ-WM50 Series) is attached.
	Operating environment humidity	20% to 80% (no condensation)

Remote control unit

Power supply		3V DC (AAA/R03/LR03 battery x 2)
Operation range		Approx. 20 m [65 ft 7 in] (when operated directly in front of signal receptor)
Dimensions	Width	44 mm [1 47/64 in]
	Height	105 mm [4 9/64 in]
	Depth	20.5 mm [13/16 in]
Weight ¹⁰		Approx. 63 g (2.22 ozs.) including batteries

Supplied accessories

- Power cord (x 2 for Europe and Asia model/ x 1 for other countries)
- Wireless remote control unit (x 1)
- Batteries for remote control (R03/AAA type x 2)

Other Applications

- Multi Monitoring and Control Software (for Windows)
- Presenter Light Software (for Windows)
- Wireless Projector App (for iOS/Android™)
- Projector Network Setup Software (for Windows)

Optional accessories

Ceiling Mount Bracket	for high ceilings	ET-PKL100H
	for low ceilings	ET-PKL100S
	Attachment plate	ET-PKV400B
Replacement Filter Unit		ET-RFV500
Wireless Module		AJ-WM50 Note: The suffix at the end of the model number is omitted. Operating Temperature when attached to the projector: 0-40 °C (32-104 °F).
Wireless Presentation System (PressIT)		TY-WPS2 (basic set) Note: For further details, please visit the following website: https://docs.connect.panasonic.com/prodisplays/pressit/

Weights and dimensions shown are approximate. Specifications subject to change without notice.

1 Measurement, measuring conditions, and method of notation all comply with ISO/IEC 21118: 2020 international standards. Value is average of all products when shipped.

2 Measurement, measuring conditions, and method of notation all comply with American National Standards Institute standards. Value is the average of all products when shipped.

3 Around this time, light output will have decreased by approximately 50%. IEC62087: 2008 Broadcast contents, Dynamic Contrast [2], under conditions with 30 °C (86 °F), 700 m (2,297 ft) above sea level, and 0.15 mg/m³ of particulate matter. Panasonic recommends cleaning or checkup at point of purchase after about 20,000 hours. Light-source lifetime may be reduced depending on environmental conditions.

Replacement of parts other than the light source may be required in a shorter period. Estimated maintenance time varies depending on environment.

4 Resolution decreases when using this function. 6-Point Screen Correction, V/H Keystone Correction, and curved-screen correction are not available when using this function, and range of corner adjustment is limited.

5 When optical zoom is used together and Digital Zoom Extender is set to 80%.

6 A signal with different resolution is converted to the number of display dots.

7 Depending on the connected CEC-compatible device, the link control may not operate normally.


8 Optional wireless module AJ-WM50 does not support IPv6.

9 With legs at shortest position.

10 Average value. May differ depending on the actual unit.

11 Note that projector cannot be used at altitudes 2,700 m (8,858 ft) or higher above sea level. In the following operating environments, light output may be reduced to protect the projector; when the projector is used at altitudes below 700 m (2,297 ft) and ambient temperature is 36 °C (97 °F) or higher; when the projector is used at altitudes between 700 m (2,297 ft) and 1,400 m (4,593 ft) exclusive and ambient temperature is 34 °C (93 °F) or higher; when the projector is used at altitudes between 1,400 m (4,593 ft) and 2,100 m (6,890 ft) exclusive and ambient temperature is 32 °C (90 °F) or higher; and when the projector is used at altitudes between 2,100 m (6,890 ft) and 2,700 m (8,858 ft) exclusive and ambient temperature is 30 °C (86 °F) or higher.


Terminals

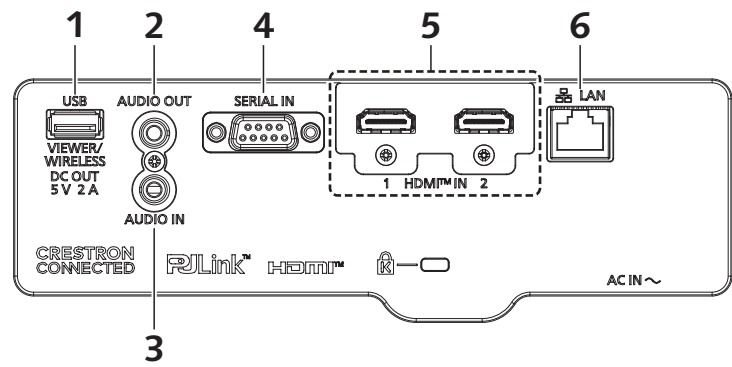

1	USB (VIEWER/WIRELESS/DC OUT)	5	HDMI™ IN 1/HDMI™ IN 2
2	AUDIO OUT	6	LAN
3	AUDIO IN		
4	SERIAL IN		


Dimensions

unit : mm [inch]
NOTE: This illustration is not drawn to scale.

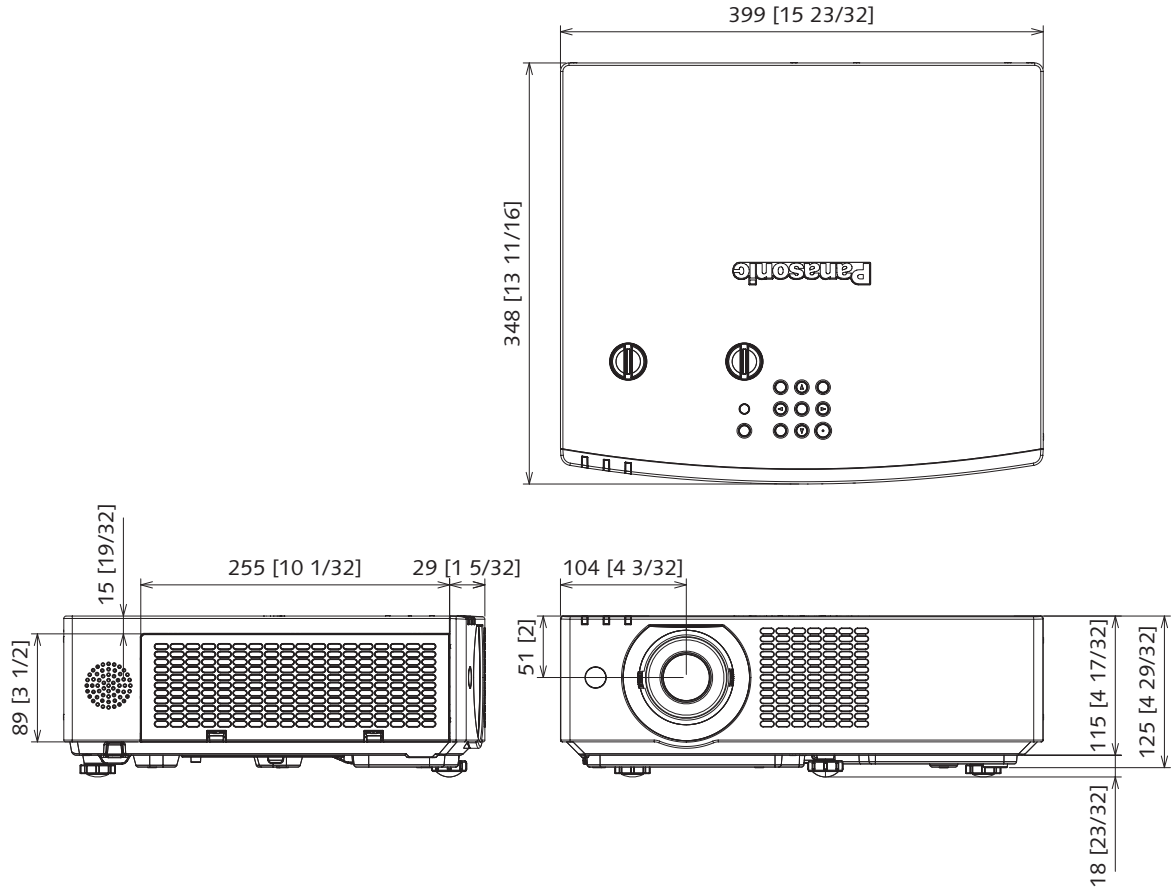

Projected image and throw distance

Install the projector referring to the projected image size and projection distance. Image size and image position can be adjusted in accordance with the screen size and screen position.

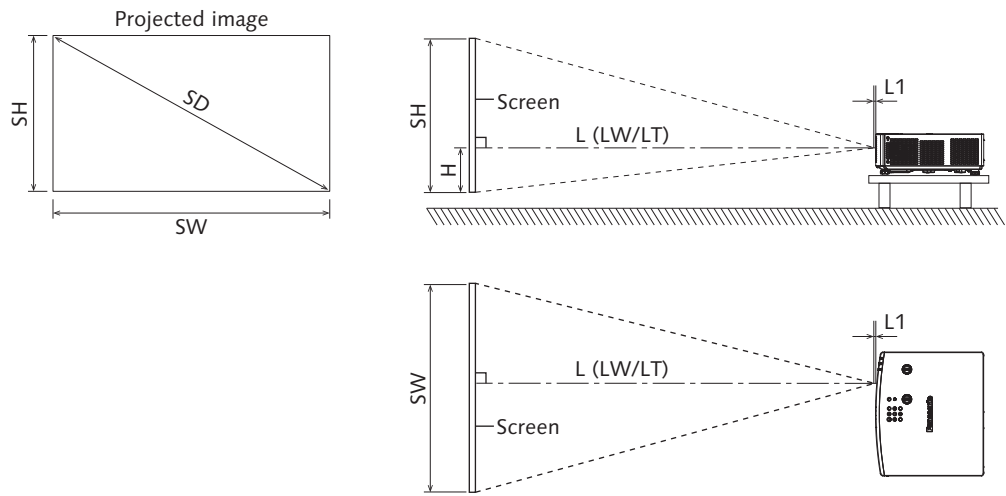


Note

- This illustration is prepared on the assumption that the projected image size and position have been aligned to fit full in the screen.
- This illustration is not drawn to scale.

L		Projection distance
	LW	Minimum distance
	LT	Maximum distance
L1	Lens protrusion dimension (distance from the front surface of the projector to the front end of the projection lens)	
SH	Projected image height	
SW	Projected image width	
H	Distance from the lens center to the bottom edge of the projected image	
SD	Projected image size	

Standard setting position

Illustrations show the projector installed using optional ceiling mount bracket ET-PKL100H and projector mount bracket ET-PKV400B.

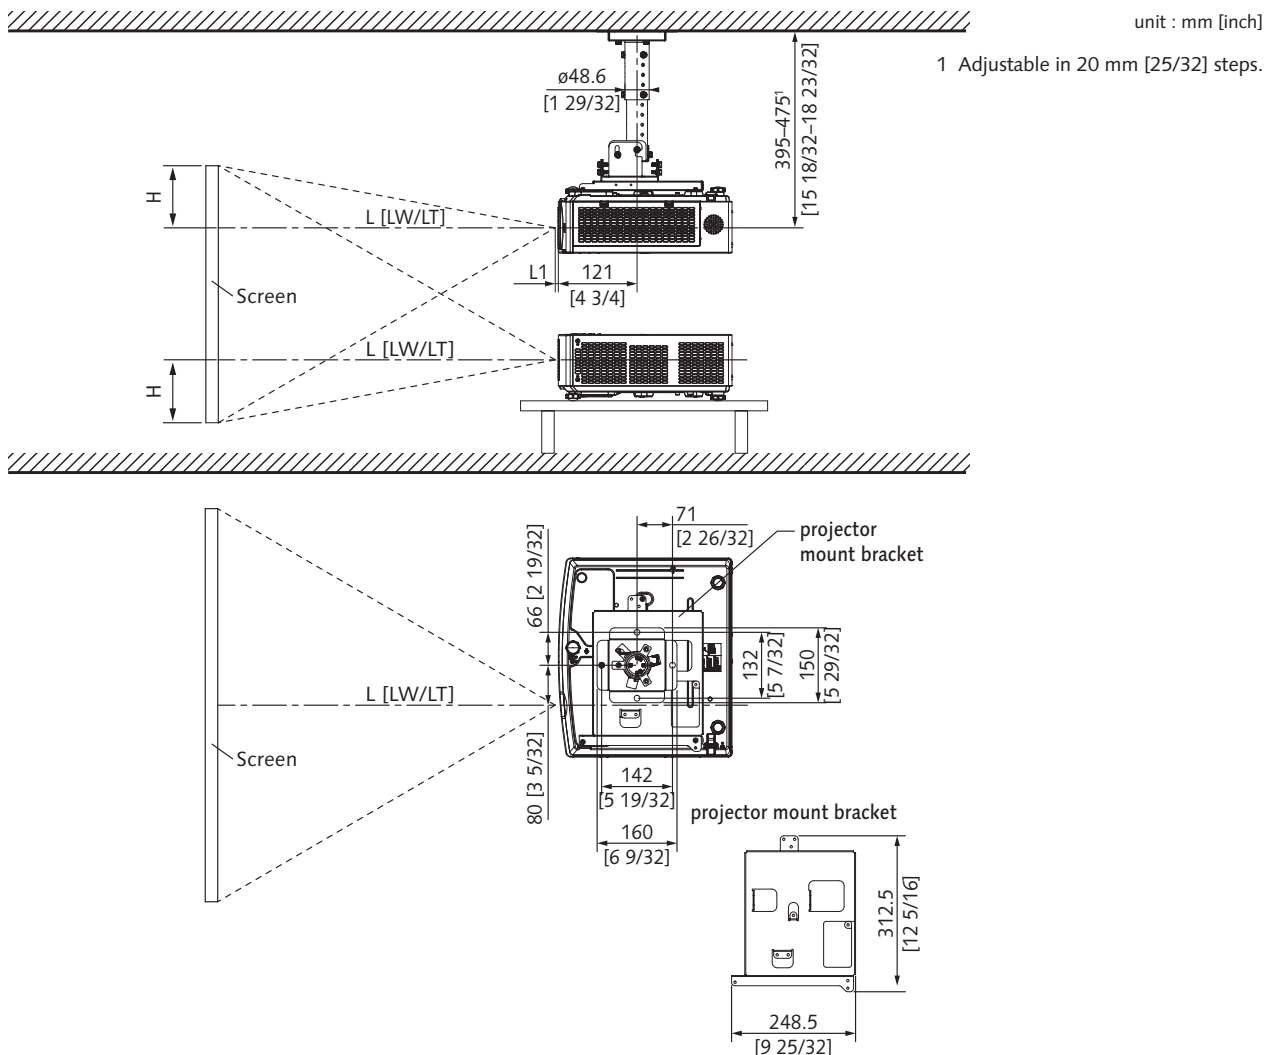


Caution

- All construction work should be done by a qualified technician.
- When mounting to the ceiling, use the special mounting bracket.
Furthermore, in order to prevent it from falling down from the ceiling, use the supplied wire on the mounting bracket.

Note

- This illustration is prepared on the assumption that the projected image size and position have been aligned to fit full in the screen.
- This illustration is not drawn to scale.
- The values are approximate.

Illustrations show the projector installed using optional ceiling mount bracket ET-PKL100S and projector mount bracket ET-PKV400B.

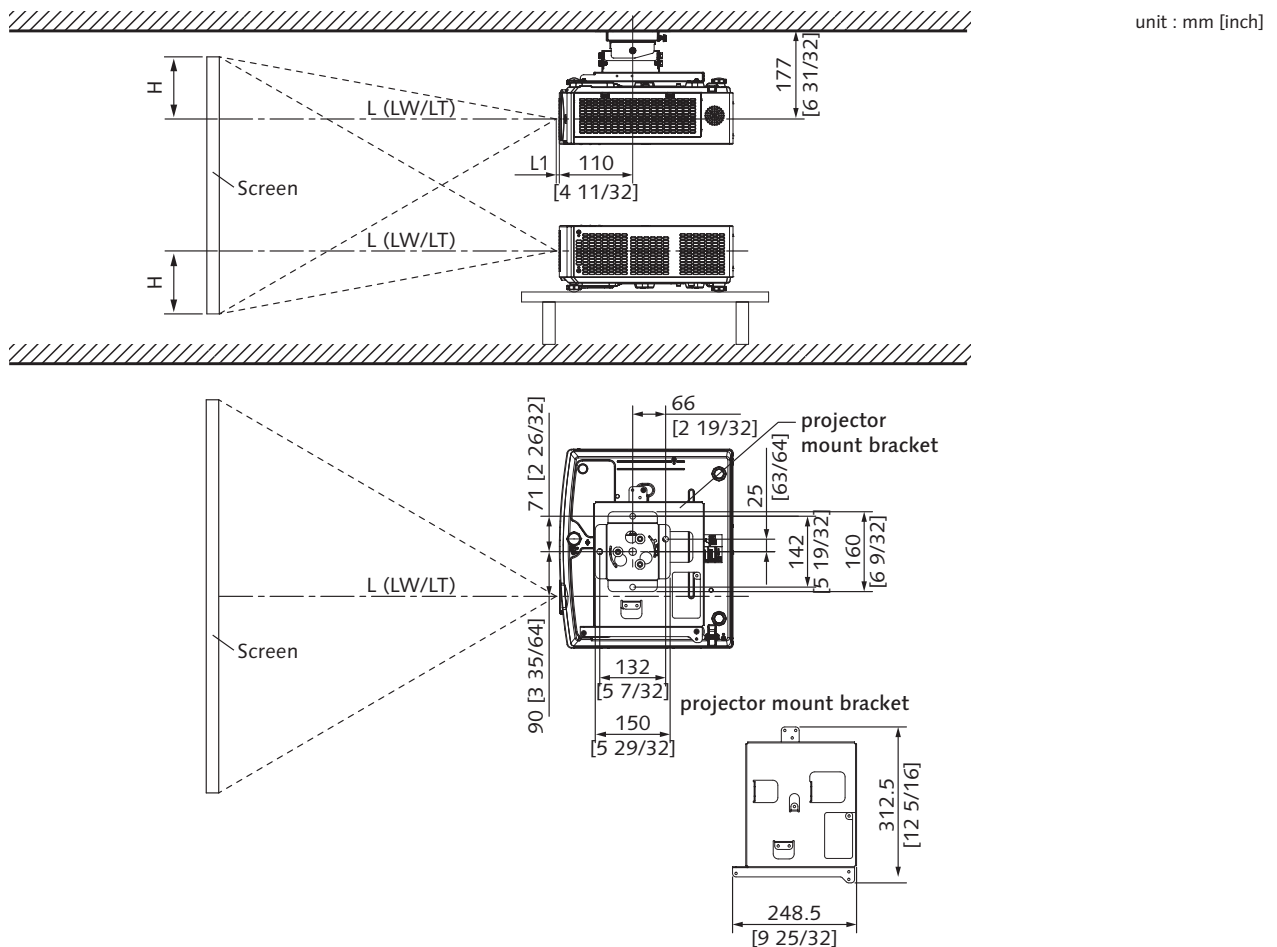

Caution

- All construction work should be done by a qualified technician.
- When mounting to the ceiling, use the special mounting bracket.
Furthermore, in order to prevent it from falling down from the ceiling, use the supplied wire on the mounting bracket.

Note

- This illustration is prepared on the assumption that the projected image size and position have been aligned to fit full in the screen.
- This illustration is not drawn to scale.
- The values are approximate.

Projection distance

A $\pm 5\%$ error in listed projection distances may occur. When [SCREEN ADJUSTMENT] is used, distance is corrected to become smaller than the specified image size.

Screen aspect ratio 16:10

Unit: meters

				Optical zoom		Digital Zoom Extender	Height from the edge of screen to center of lens (H) ³
Throw ratio				1.36-1.64:1		1.36-2.05:1 (Corresponding Value) ¹	
Projected image size				Projection distance (L)			
Diagonal (SD)		Height (SH)	Width (SW)	Min. (LW)	Max. (LT)	Max. (LT) ²	
m	inches						
0.76	30	0.40	0.65	0.86	1.04	1.31	0.048 - 0.202
1.02	40	0.54	0.86	1.15	1.40	1.75	0.065 - 0.269
1.27	50	0.67	1.08	1.45	1.75	2.20	0.081 - 0.337
1.52	60	0.81	1.29	1.74	2.11	2.64	0.097 - 0.404
1.78	70	0.94	1.51	2.04	2.46	3.09	0.113 - 0.471
2.03	80	1.08	1.72	2.33	2.82	3.53	0.129 - 0.538
2.29	90	1.21	1.94	2.63	3.18	3.98	0.145 - 0.606
2.54	100	1.35	2.15	2.92	3.53	4.42	0.162 - 0.673
3.05	120	1.62	2.58	3.51	4.24	5.31	0.194 - 0.808
3.81	150	2.02	3.23	4.40	5.31	6.65	0.242 - 1.010
5.08	200	2.69	4.31	5.87	7.09	8.87	0.323 - 1.346
6.35	250	3.37	5.38	7.35	8.87	11.09	0.404 - 1.683
7.62	300	4.04	6.46	8.82	10.65	13.32	0.485 - 2.019

1 When optical zoom and Digital Zoom Extender are used together.

2 When [EXTENDER RATIO] is set to [80%].

3 Only for optical zoom

Unit: feet

				Optical zoom		Digital Zoom Extender	Height from the edge of screen to center of lens (H) ³
Throw ratio				1.36-1.64:1		1.36-2.05:1 (Corresponding Value) ¹	
Projected image size				Projection distance (L)			
Diagonal (SD)		Height (SH)	Width (SW)	Min. (LW)	Max. (LT)	Max. (LT) ²	
m	inches						
0.76	30	1.32	2.12	2.82	3.42	4.29	0.159 - 0.662
1.02	40	1.77	2.83	3.78	4.58	5.75	0.212 - 0.883
1.27	50	2.21	3.53	4.75	5.75	7.21	0.265 - 1.104
1.52	60	2.65	4.24	5.72	6.92	8.67	0.318 - 1.325
1.78	70	3.09	4.95	6.69	8.09	10.13	0.371 - 1.546
2.03	80	3.53	5.65	7.66	9.25	11.59	0.424 - 1.767
2.29	90	3.97	6.36	8.62	10.42	13.05	0.477 - 1.987
2.54	100	4.42	7.07	9.59	11.59	14.51	0.530 - 2.208
3.05	120	5.30	8.48	11.53	13.92	17.43	0.636 - 2.650
3.81	150	6.62	10.60	14.43	17.43	21.81	0.795 - 3.312
5.08	200	8.83	14.13	19.27	23.26	29.10	1.060 - 4.417
6.35	250	11.04	17.67	24.11	29.10	36.40	1.325 - 5.521
7.62	300	13.25	21.20	28.95	34.94	43.70	1.590 - 6.625

1 When optical zoom and Digital Zoom Extender are used together.

2 When [EXTENDER RATIO] is set to [80%].

3 Only for optical zoom

Screen aspect ratio 16:9

Unit: meters

Screen aspect ratio: 16:9				Optical zoom		Digital Zoom Extender	Height from the edge of screen to center of lens (H) ³
Throw ratio				1.36-1.64:1		1.36-2.05:1 (Corresponding Value) ¹	
Projected image size				Projection distance (L)			
Diagonal (SD)		Height (SH)	Width (SW)	Min. (LW)	Max. (LT)	Max. (LT) ²	
m	inches						
0.76	30	0.37	0.66	0.88	1.07	1.35	0.029 - 0.187
1.02	40	0.50	0.89	1.19	1.44	1.80	0.039 - 0.249
1.27	50	0.62	1.11	1.49	1.80	2.26	0.048 - 0.311
1.52	60	0.75	1.33	1.79	2.17	2.72	0.058 - 0.374
1.78	70	0.87	1.55	2.10	2.53	3.17	0.068 - 0.436
2.03	80	1.00	1.77	2.40	2.90	3.63	0.077 - 0.498
2.29	90	1.12	1.99	2.70	3.27	4.09	0.087 - 0.560
2.54	100	1.25	2.21	3.01	3.63	4.55	0.097 - 0.623
3.05	120	1.49	2.66	3.61	4.36	5.46	0.116 - 0.747
3.81	150	1.87	3.32	4.52	5.46	6.83	0.145 - 0.934
5.08	200	2.49	4.43	6.04	7.29	9.12	0.194 - 1.245
6.35	250	3.11	5.53	7.55	9.12	11.40	0.242 - 1.557
7.62	300	3.74	6.64	9.07	10.95	13.69	0.291 - 1.868

1 When optical zoom and Digital Zoom Extender are used together.

2 When [EXTENDER RATIO] is set to [80%].

3 Only for optical zoom

Unit: feet

				Optical zoom		Digital Zoom Extender	Height from the edge of screen to center of lens (H) ³
Throw ratio				1.36-1.64:1		1.36-2.05:1 (Corresponding Value) ¹	
Projected image size				Projection distance (L)			
Diagonal (SD)		Height (SH)	Width (SW)	Min. (LW)	Max. (LT)	Max. (LT) ²	
m	inches						
0.76	30	1.23	2.18	2.90	3.51	4.41	0.095 - 0.613
1.02	40	1.63	2.91	3.89	4.71	5.91	0.127 - 0.817
1.27	50	2.04	3.63	4.89	5.91	7.41	0.159 - 1.021
1.52	60	2.45	4.36	5.88	7.11	8.91	0.191 - 1.226
1.78	70	2.86	5.08	6.88	8.31	10.41	0.222 - 1.430
2.03	80	3.27	5.81	7.87	9.51	11.91	0.254 - 1.634
2.29	90	3.68	6.54	8.86	10.71	13.41	0.286 - 1.838
2.54	100	4.09	7.26	9.86	11.91	14.91	0.318 - 2.043
3.05	120	4.90	8.72	11.85	14.31	17.91	0.381 - 2.451
3.81	150	6.13	10.89	14.83	17.91	22.41	0.477 - 3.064
5.08	200	8.17	14.53	19.81	23.91	29.91	0.636 - 4.085
6.35	250	10.21	18.16	24.78	29.91	37.41	0.794 - 5.107
7.62	300	12.26	21.79	29.75	35.91	44.91	0.953 - 6.128

1 When optical zoom and Digital Zoom Extender are used together.

2 When [EXTENDER RATIO] is set to [80%].

3 Only for optical zoom

Screen aspect ratio 4:3

Unit: meters

Screen aspect ratio - 16:9				Optical zoom		Digital Zoom Extender	Height from the edge of screen to center of lens (H) ³
Throw ratio				1.63-1.97:1		1.63-2.47:1 (Corresponding Value) ¹	
Projected image size				Projection distance (L)			
Diagonal (SD)		Height (SH)	Width (SW)	Min. (LW)	Max. (LT)	Max. (LT) ²	
m	inches						
0.76	30	0.46	0.61	0.98	1.18	1.48	0.055 - 0.229
1.02	40	0.61	0.81	1.31	1.59	1.99	0.073 - 0.305
1.27	50	0.76	1.02	1.64	1.99	2.49	0.091 - 0.381
1.52	60	0.91	1.22	1.98	2.39	3.00	0.110 - 0.457
1.78	70	1.07	1.42	2.31	2.79	3.50	0.128 - 0.533
2.03	80	1.22	1.63	2.64	3.20	4.00	0.146 - 0.610
2.29	90	1.37	1.83	2.98	3.60	4.51	0.165 - 0.686
2.54	100	1.52	2.03	3.31	4.00	5.01	0.183 - 0.762
3.05	120	1.83	2.44	3.98	4.81	6.02	0.219 - 0.914
3.81	150	2.29	3.05	4.98	6.02	7.53	0.274 - 1.143
5.08	200	3.05	4.06	6.65	8.03	10.05	0.366 - 1.524
6.35	250	3.81	5.08	8.32	10.05	12.56	0.457 - 1.905
7.62	300	4.57	6.10	9.99	12.06	15.08	0.549 - 2.286

1 When optical zoom and Digital Zoom Extender are used together.

2 When [EXTENDER RATIO] is set to [80%].

3 Only for optical zoom

Unit: feet

				Optical zoom		Digital Zoom Extender	Height from the edge of screen to center of lens (H) ³
Throw ratio				1.63-1.97:1		1.63-2.47:1 (Corresponding Value) ¹	
Projected image size				Projection distance (L)			
Diagonal (SD)		Height (SH)	Width (SW)	Min. (LW)	Max. (LT)	Max. (LT) ²	
m	inches						
0.76	30	1.50	2.00	3.20	3.88	4.87	0.180 - 0.750
1.02	40	2.00	2.67	4.30	5.20	6.52	0.240 - 1.000
1.27	50	2.50	3.33	5.39	6.52	8.17	0.300 - 1.250
1.52	60	3.00	4.00	6.49	7.84	9.83	0.360 - 1.500
1.78	70	3.50	4.67	7.58	9.17	11.48	0.420 - 1.750
2.03	80	4.00	5.33	8.68	10.49	13.13	0.480 - 2.000
2.29	90	4.50	6.00	9.77	11.81	14.78	0.540 - 2.250
2.54	100	5.00	6.67	10.87	13.13	16.44	0.600 - 2.500
3.05	120	6.00	8.00	13.06	15.77	19.74	0.720 - 3.000
3.81	150	7.50	10.00	16.35	19.74	24.70	0.900 - 3.750
5.08	200	10.00	13.33	21.82	26.35	32.96	1.200 - 5.000
6.35	250	12.50	16.67	27.30	32.96	41.22	1.500 - 6.250
7.62	300	15.00	20.00	32.78	39.57	49.48	1.800 - 7.500

1 When optical zoom and Digital Zoom Extender are used together.

2 When [EXTENDER RATIO] is set to [80%].

3 Only for optical zoom

Screen aspect ratio 21:9

Unit: meters

Screen aspect ratio 2:1.5				Optical zoom		Digital Zoom Extender	Height from the edge of screen to center of lens (H) ³
Throw ratio				1.36-1.64:1		1.36-2.05:1 (Corresponding Value) ¹	
Projected image size				Projection distance (L)			
Diagonal (SD)		Height (SH)	Width (SW)	Min. (LW)	Max. (LT)	Max. (LT) ²	
m	inches						
0.76	30	0.30	0.70	0.93	1.13	1.42	-0.019 - 0.148
1.02	40	0.39	0.94	1.26	1.52	1.91	-0.025 - 0.197
1.27	50	0.49	1.17	1.58	1.91	2.39	-0.031 - 0.247
1.52	60	0.59	1.40	1.90	2.29	2.87	-0.037 - 0.296
1.78	70	0.69	1.64	2.22	2.68	3.36	-0.044 - 0.346
2.03	80	0.79	1.87	2.54	3.07	3.84	-0.050 - 0.395
2.29	90	0.89	2.11	2.86	3.45	4.32	-0.056 - 0.444
2.54	100	0.99	2.34	3.18	3.84	4.81	-0.062 - 0.494
3.05	120	1.18	2.81	3.82	4.61	5.77	-0.075 - 0.592
3.81	150	1.48	3.51	4.78	5.77	7.22	-0.093 - 0.740
5.08	200	1.97	4.68	6.38	7.71	9.64	-0.124 - 0.987
6.35	250	2.47	5.85	7.99	9.64	12.06	-0.155 - 1.234
7.62	300	2.96	7.02	9.59	11.57	14.47	-0.186 - 1.481

1 When optical zoom and Digital Zoom Extender are used together.

2 When [EXTENDER RATIO] is set to [80%].

3 Only for optical zoom

Unit: feet

				Optical zoom		Digital Zoom Extender	Height from the edge of screen to center of lens (H) ³
Throw ratio				1.36-1.64:1		1.36-2.05:1 (Corresponding Value) ¹	
Projected image size				Projection distance (L)			
Diagonal (SD)		Height (SH)	Width (SW)	Min. (LW)	Max. (LT)	Max. (LT) ²	
m	inches						
0.76	30	0.97	2.30	3.07	3.72	4.67	-0.061 - 0.486
1.02	40	1.30	3.07	4.12	4.99	6.26	-0.082 - 0.648
1.27	50	1.62	3.84	5.17	6.26	7.84	-0.102 - 0.810
1.52	60	1.94	4.61	6.22	7.52	9.43	-0.122 - 0.972
1.78	70	2.27	5.37	7.27	8.79	11.01	-0.143 - 1.134
2.03	80	2.59	6.14	8.32	10.06	12.60	-0.163 - 1.296
2.29	90	2.92	6.91	9.38	11.33	14.18	-0.184 - 1.458
2.54	100	3.24	7.68	10.43	12.60	15.77	-0.204 - 1.620
3.05	120	3.89	9.21	12.53	15.14	18.94	-0.245 - 1.943
3.81	150	4.86	11.52	15.69	18.94	23.70	-0.306 - 2.429
5.08	200	6.48	15.36	20.94	25.28	31.63	-0.408 - 3.239
6.35	250	8.10	19.19	26.20	31.63	39.56	-0.510 - 4.049
7.62	300	9.72	23.03	31.46	37.97	47.48	-0.612 - 4.859

1 When optical zoom and Digital Zoom Extender are used together.

2 When [EXTENDER RATIO] is set to [80%].

3 Only for optical zoom

Formula for calculating the projection distance

To use a projected image size not listed in this manual, check the projected image size SD (m) and use the respective formula to calculate the value.

The unit of all the formulae is m. (Values obtained by the following calculation formulae contain a slight error.)

When calculating the value using image size designation (value in inches), multiply the value in inches by 0.0254 and substitute it into SD in the formula.

Unit: m

Aspect ratio	Projection distance (L)			
	Optical zoom		Digital Zoom Extender	
	Min. (LW)	Max. (LT)	Min. (LW)	Max. (LT)
16:10	$\approx 1.1614 \times SD - 0.0265$	$\approx 1.4011 \times SD - 0.0264$	$\approx 1.1614 \times SD / X - 0.0265$	$\approx 1.4011 \times SD / X - 0.0264$
16:9	$\approx 1.1936 \times SD - 0.0265$	$\approx 1.4400 \times SD - 0.0264$	$\approx 1.1936 \times SD / X - 0.0265$	$\approx 1.4400 \times SD / X - 0.0264$
4:3	$\approx 1.3147 \times SD - 0.0265$	$\approx 1.5861 \times SD - 0.0264$	$\approx 1.3147 \times SD / X - 0.0265$	$\approx 1.5861 \times SD / X - 0.0264$
21:9	$\approx 1.2618 \times SD - 0.0265$	$\approx 1.5223 \times SD - 0.0264$	$\approx 1.2618 \times SD / X - 0.0265$	$\approx 1.5223 \times SD / X - 0.0264$


* X in the formulas represents the setting value of [EXTENDER RATIO] (100%=1.00, 99%=0.99, ...).

Note

- The value for L (distance to screen) varies slightly within $\pm 5\%$ depending on the zoom lens characteristics.
- When keystone correction is used, the image is corrected in the direction that reduces its projected size.

Adjustment range by the lens position shift (optical shift)


The projector supports lens shift in horizontal and vertical direction. The following figure shows the lens shift adjustable range in horizontal and vertical direction with reference to the standard projection position.

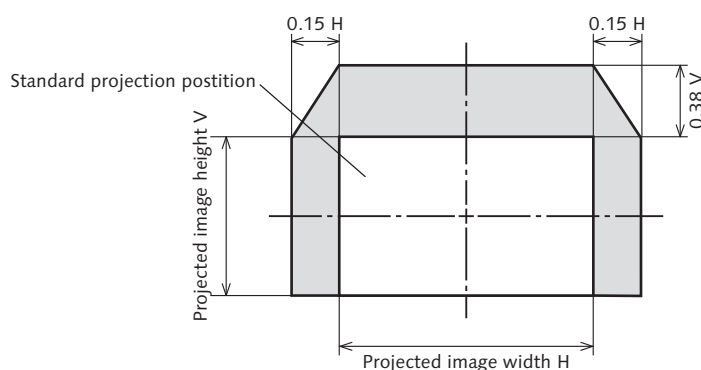

Note

- The standard projection position indicates the projection screen position in the state without lens shift adjustment.

[SCREEN ADJUSTMENT] projection range

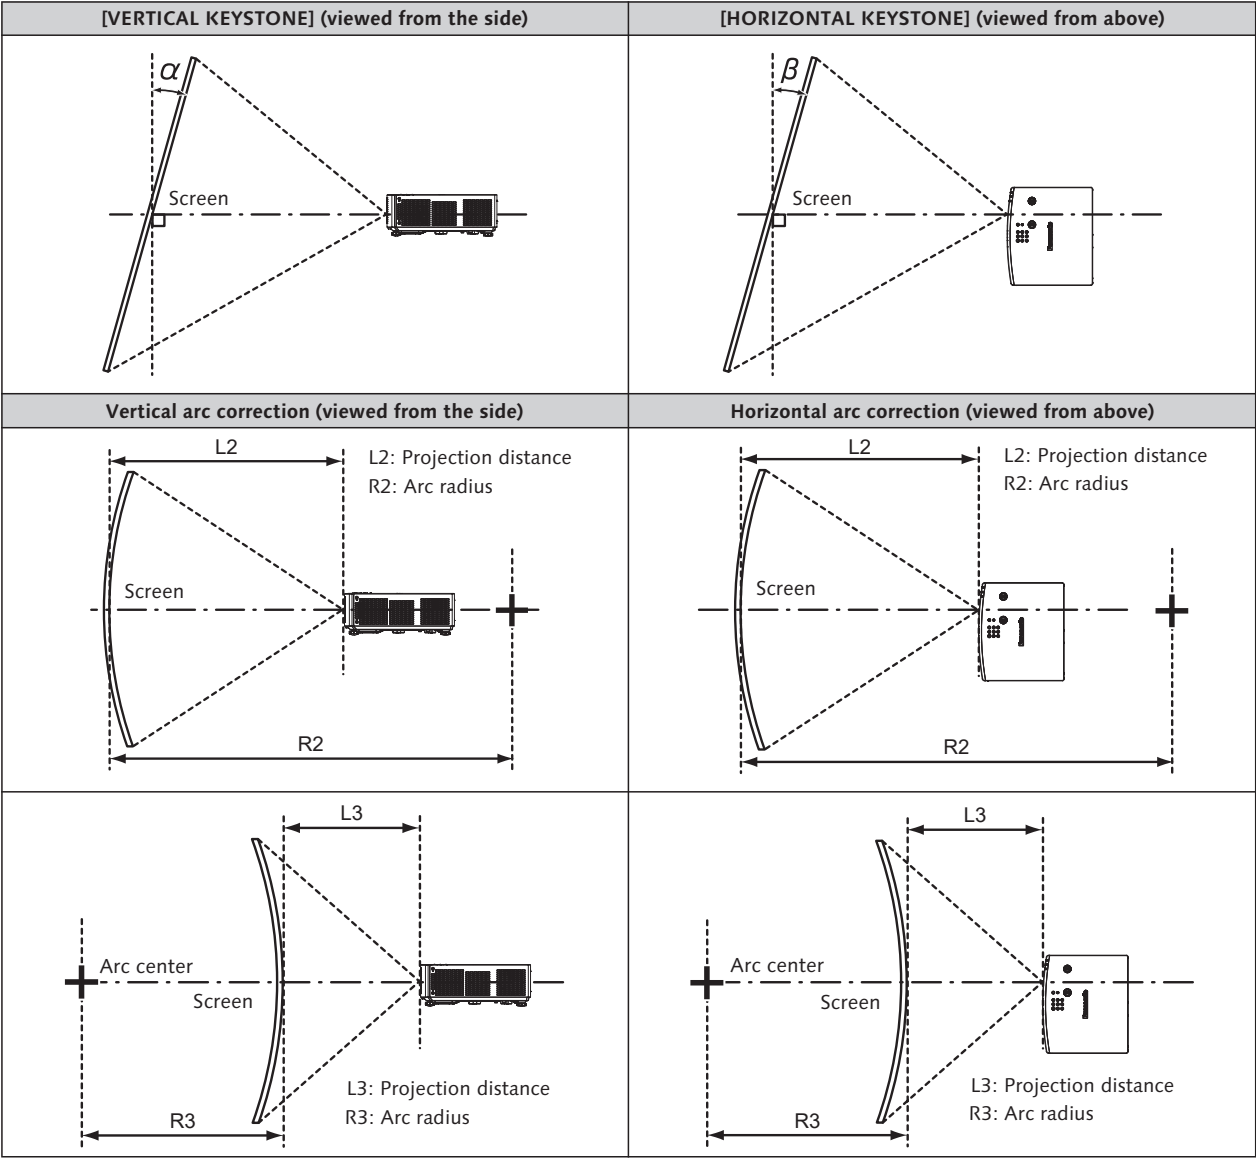

Model No.	Only [KEYSTONE] used		Only [CURVED CORRECTION] used	
	Vertical keystone correction angle α (°)	Horizontal keystone correction angle β (°)	Min. value of R2/L2	Min. value of R3/L3
PT-VMZ5ES	±25	±35	0.7	0.8


Note

- When [SCREEN ADJUSTMENT] is used, the focus of the entire screen may be lost as correction increases.
- Make the curved screen a circular arc shape with one part of a perfect circle removed.


Installable angle

Install the projector at an angle within the range shown below.


FULL 360-degree projection

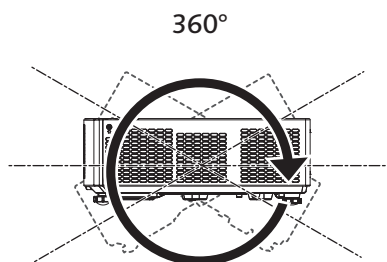

Vertical 360-deg.

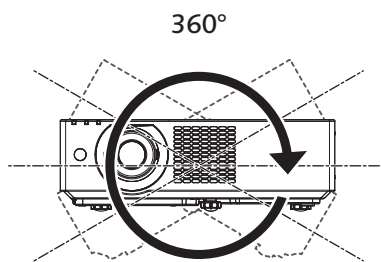

Horizontal 360-deg.








Tilting 360-deg.
(Vertical and Horizontal combination)

Notes on projector placement and operation

- Do not stack projectors on top of each other.
- Do not use the projector supporting it by the top.
- Do not block the intake/exhaust vents of the projector.
- Prevent hot and cool air from the air conditioning system to blow directly to the intake/exhaust vents of the projector.
- Do not install the projector in a confined space.

When installing the projector in a confined space, provide air conditioning or ventilation separately.

Exhaust heat may accumulate when the ventilation is not enough, triggering the protection circuit of the projector.

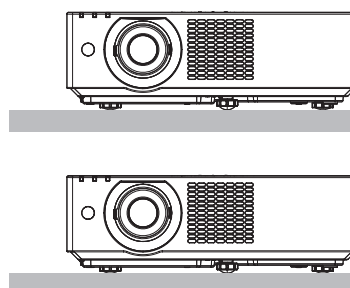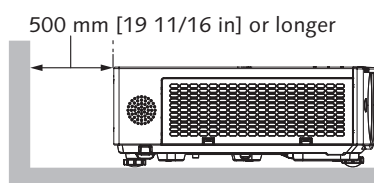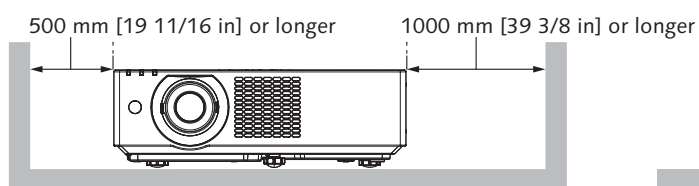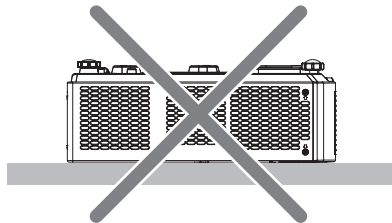

200 mm [7 7/8 in] or longer

List of compatible signals

The following table specifies the type of signals compatible with the projector.

- The content of the compatible signal column is as follows.
 - V: Video signal
 - C: Computer signal
- Input corresponding to each item in the compatible signals and EDID table columns is as follows.
 - HDMI™: HDMI™ 1/ HDMI™ 2 input

Signal type	Signal name	Resolution (Dots)	Scanning freq.		Dot clock freq. (MHz)	Compatible signals	EDID Table
			Horizontal (kHz)	Vertical (Hz)		HDMI™	HDMI™
V	480 /60p	720 x 480	31.5	59.9	27.0	✓	○
	576 /50p	720 x 576	31.3	50.0	27.0	✓	○
	720 /60p	1280 x 720	45.0	60.0 ¹	74.3	✓	○
	720 /50p	1280 x 720	37.5	50.0	74.3	✓	○
	1080 /60i	1920 x 1080i	33.8	60.0 ¹	74.3	✓	○
	1080 /50i	1920 x 1080i	28.1	50.0	74.3	✓	○
	1080 /24p	1920 x 1080	27.0	24.0 ¹	74.3	✓	○
	1080 /24sF	1920 x 1080i	27.0	48.0 ¹	74.3	✓	–
	1080 /25p	1920 x 1080	28.1	25.0	74.3	✓	–
	1080 /30p	1920 x 1080	33.8	30.0 ¹	74.3	✓	–
	1080 /60p	1920 x 1080	67.5	60.0 ¹	148.5	✓	○
	1080 /50p	1920 x 1080	56.3	50.0	148.5	✓	○
	3840 x 2160/24p	3840 x 2160	54.0	24.0 ¹	297.0	✓	○
	3840 x 2160/25p	3840 x 2160	56.3	25.0	297.0	✓	○
	3840 x 2160/30p	3840 x 2160	67.5	30.0 ¹	297.0	✓	○
	4096 x 2160/24p	4096 x 2160	54.0	24.0 ¹	297.0	✓	○
C	4096 x 2160/25p	4096 x 2160	56.3	25.0	297.0	✓	○
	4096 x 2160/30p	4096 x 2160	67.5	30.0 ¹	297.0	✓	○
	640 x 480/60	640 x 480	31.5	59.9	25.2	✓	○
	800 x 600/60	800 x 600	37.9	60.3	40.0	✓	○
	1024 x 768/50	1024 x 768	39.6	50.0	51.9	✓	–
	1024 x 768/60	1024 x 768	48.4	60.0	65.0	✓	○
	1024 x 768/70	1024 x 768	56.5	70.1	75.0	✓	○
	1024 x 768/75	1024 x 768	60.0	75.0	78.8	✓	○
	1152 x 864/75	1152 x 864	67.5	75.0	108.0	✓	–
	1152 x 864/85	1152 x 864	77.1	85.0	119.7	✓	–
	1280 x 720/60	1280 x 720	44.8	59.9	74.5	✓	–
	1280 x 768/60	1280 x 768	47.8	59.9	79.5	✓	–
	1280 x 800/50	1280 x 800	41.3	50.0	68.0	✓	–
	1280 x 800/60	1280 x 800	49.7	59.8	83.5	✓	○
	1280 x 800/75	1280 x 800	62.8	74.9	106.5	✓	–
	1280 x 800/85	1280 x 800	71.6	84.9	122.5	✓	–
	1280 x 960/60	1280 x 960	60.0	60.0	108.0	✓	–
	1280 x 1024/60	1280 x 1024	64.0	60.0	108.0	✓	–
	1280 x 1024/75	1280 x 1024	80.0	75.0	135.0	✓	○
	1280 x 1024/85	1280 x 1024	91.1	85.0	157.5	✓	–
	1366 x 768/60	1366 x 768	47.7	59.8	85.5	✓	–
	1400 x 1050/60	1400 x 1050	65.3	60.0	121.8	✓	–
	1400 x 1050/75	1400 x 1050	82.2	75.0	155.9	✓	–
	1440 x 900/60	1440 x 900	55.9	59.9	106.5	✓	–
	1600 x 900/60	1600 x 900	55.9	60.0	119.0	✓	–
	1600 x 1200/60	1600 x 1200	75.0	60.0	162.0	✓	○
	1680 x 1050/60	1680 x 1050	65.3	60.0	146.3	✓	–
	1920 x 720/60	1920 x 720	46.0	60.0	95.0	✓	–
	1920 x 810/60	1920 x 810	51.7	60.0	107.0	✓	–
	1920 x 1080/50	1920 x 1080	55.6	49.9	141.5	✓	–
	1920 x 1200/50	1920 x 1200	61.8	49.9	158.3	✓	–
	1920 x 1200/60 ²	1920 x 1200	74.0	60.0	154.0	✓	○
	2048 x 1536/60	2048 x 1536	95.5	60.0	267.3	✓	○
	2560 x 1080/60 ²	2560 x 1080	66.6	60.0	181.3	✓	○
	3240 x 1080/60	3240 x 1080	69.0	60.0	237.1	✓	○

¹ It also supports signals with vertical scanning frequency of 1 / 1.001 times.

² VESA CVT-RB (Reduced Blanking)-compliant

Note

- A signal with a different resolution is converted to the number of display dots.
1920 x 1200
- The "i" at the end of the resolution indicates an interlaced signal.
- When interlaced signals are connected, flickering may occur on the projected image.
- Even the above signals exist, some image signals recorded in special method may not be displayed.